


# STRAIGHTLINE PERFORMANCE

## Polaris Sportsman Reverse Light Kit

### Installation Manual 287-118

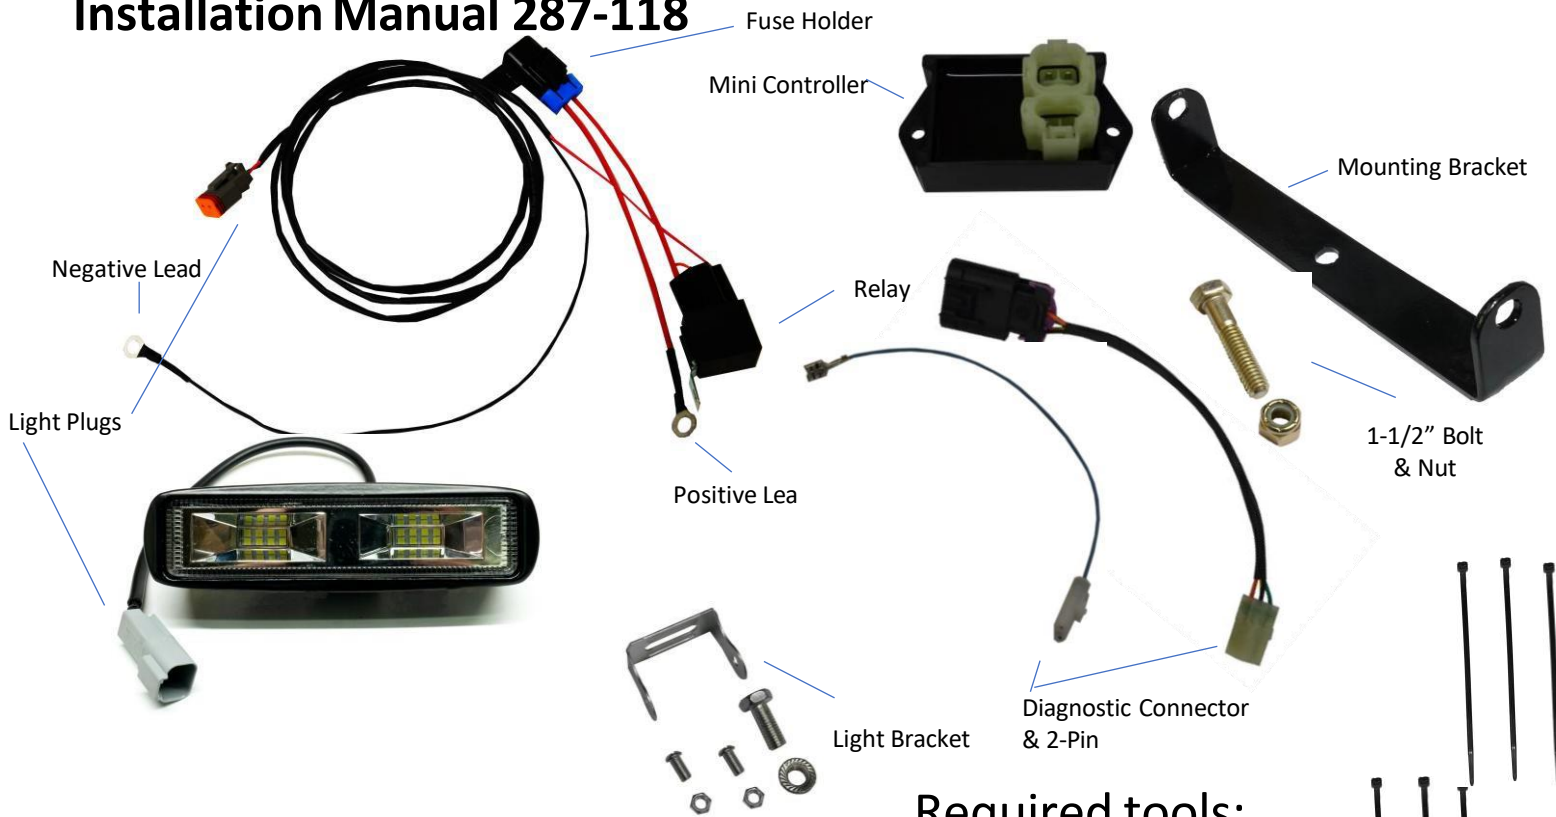

### Required tools:

Torx T-25 Bit
10mm Socket
Phillips Screwdriver
13/64" Drill Bit (optional)
1/2" Deep-Well Socket
1/2" Combination Wrench
Wire Cutter (trimming zip ties)

Read entire manual before beginning installation process.

Disclaimer: Straightline Performance is not responsible for any damage due to improper installation.

Straightline Backup Lights  
[straightlineperformance.com](http://straightlineperformance.com)

287-118


Polaris Sportsman Reverse Light  
[Tech@straightlineperformance.com](mailto:Tech@straightlineperformance.com)

1 of 5

V3



# Step 1: Remove Plastics

- 1) Remove center plastic in cargo compartment to access bus bar using T-25 Torx bit.
- 2) Remove clutch side panel (two plastic rivets).

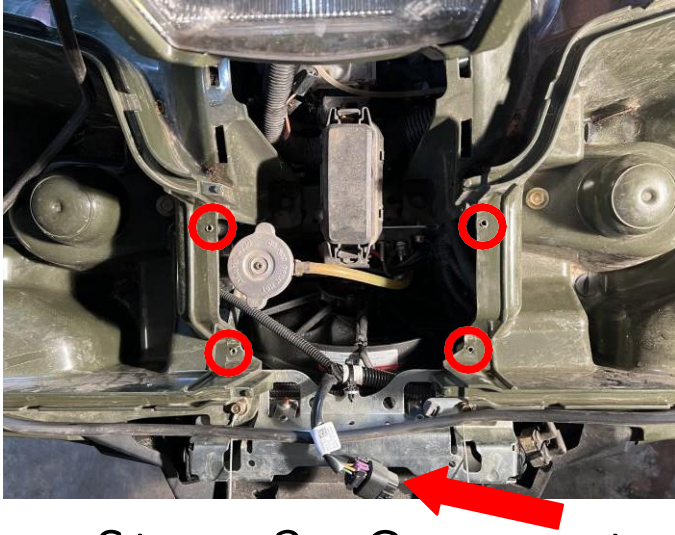

# Step 2: Connect Diagnostic Connector & Power Leads

- 1) Remove diagnostic connector cover and plug integrated connector into reverse light wiring harness.
- 2) Connect positive lead to positive terminal of bus bar and negative lead to negative terminal.

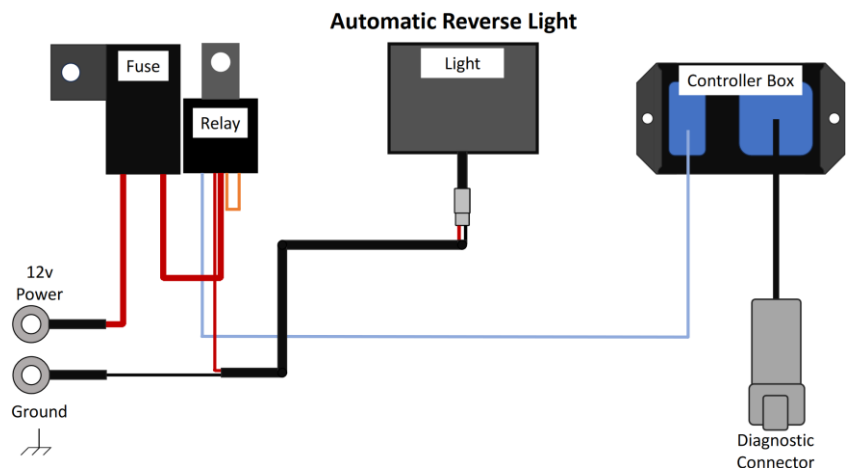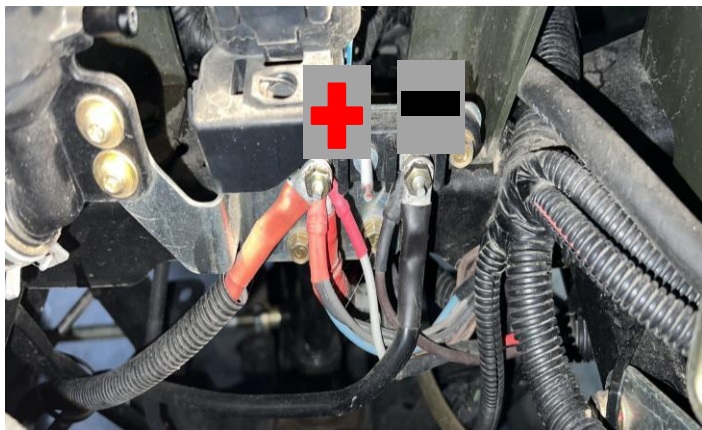

## Step 3: Mount Controller, Relay, & Fuse

- 1) Secure controller, relay, and fuse. Suggested method is to use drilling template and tighten components with provided machine screws.



## Step 4: Mount Light

- 1) Attach the light to its bracket. Be sure to slide the bolt through the bracket before attaching to light. Attach light bracket to mounting bracket.
- 2) Remove nut on the right side and fix left side with provided 1-1/2" bolt.



Straightline Backup Lights  
[Straightlineperformance.com](http://Straightlineperformance.com)

287-118


Polaris Sportsman Reverse Light  
[support@samsbackuplights.com](mailto:support@samsbackuplights.com)

3 of 5

V3

## Step 5: Route Power to Light

- 1) Run wire and connector along stock wiring harness back to reverse light, while zip-tying the wire as needed.
- 2) Plug in the reverse light

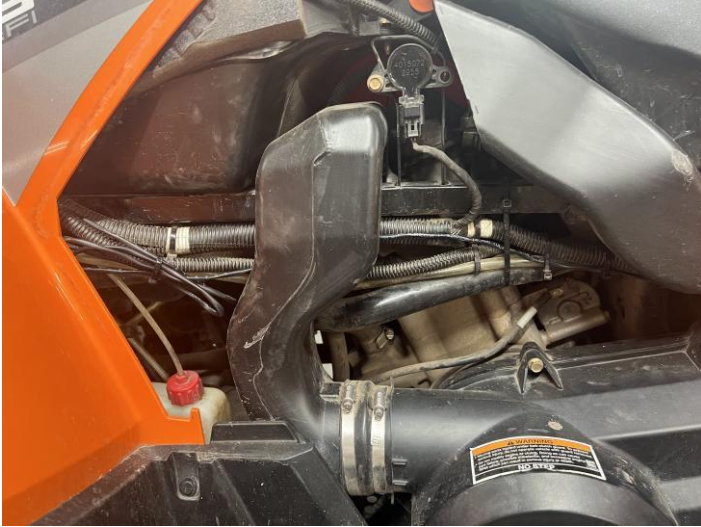

## Step 6: Reinstall Plastics



Straightline Backup Lights  
[Straightlineperformance.com](http://Straightlineperformance.com)

287-118

Polaris Sportsman Reverse Light  
[Tech@straightlineperformance.com](mailto:Tech@straightlineperformance.com)

4 of 5

V3



## Operation of Reverse Lights

Our controllers have been programmed with a manual override feature. Back-up lights may be turned on without the vehicle in reverse.

- **Fully Automatic When Shifted to Reverse**

1. No programming needed

- **Manual Override Function**

1. Shift the vehicle into neutral
2. Press reverse-override button once. The reverse light will turn on and remain on.

**\*To turn the light off repeat this procedure.**

**Note:** If the ignition is turned off while the vehicle is in reverse, or the manual override function is enabled, the lights will remain ON until the ECU enters sleep mode (approximately 30 seconds - 2 minutes depending on vehicle and ECU type).

Part Number	Description	Quantity	In Box
IT-237-101	Sportsman Rect Light Mount	1	
IT-238-104	5/16 1-1/2" long Bolt & Nut	1	
IT-287-100	60" wire harness, single connector for light, battery terminals, includes relay	1	
IT-287-102	Polaris Diagnostics Adapter Purple and black 8 pin plug on one end and 4 pin white plug on the other.	1	
IT-287-104	Polaris controller	1	
IT-287-110	Blue 4" jumper from harness relay to controller, 2 pin plug on one end flat locking spade on other.	1	
IT-288-104	long skinny light. Black aluminum housing	1	
	Make sure light had mount and hardware (SPI in house)		
Np-209	Zip Ties 6"	10	
	insert blue wire into relay, directions in folder for reference (SPI in house)		
Sticker	2 Stickers	1	
Instructions		1	

Straightline Backup Lights  
Straightlineperformance.com

Polaris Sportsman Reverse Light  
Tech@straightlineperformance.com