




Grip Insulator Instructions (GH-L2)

1. Remove current grips and grip heaters, completely clean bars of all residues from previous heaters and insulators.
2. If installing with 5" grips, be sure to cut before installation. When installing on 7"+ grips no cutting is required.
3. Slide Insulator onto handlebar flush with end.
4. Using a heat gun, begin slowly heating up the bend under the hook first and slowly work your way to the outer ends until the grip insulator is completely shrunk onto handlebar.

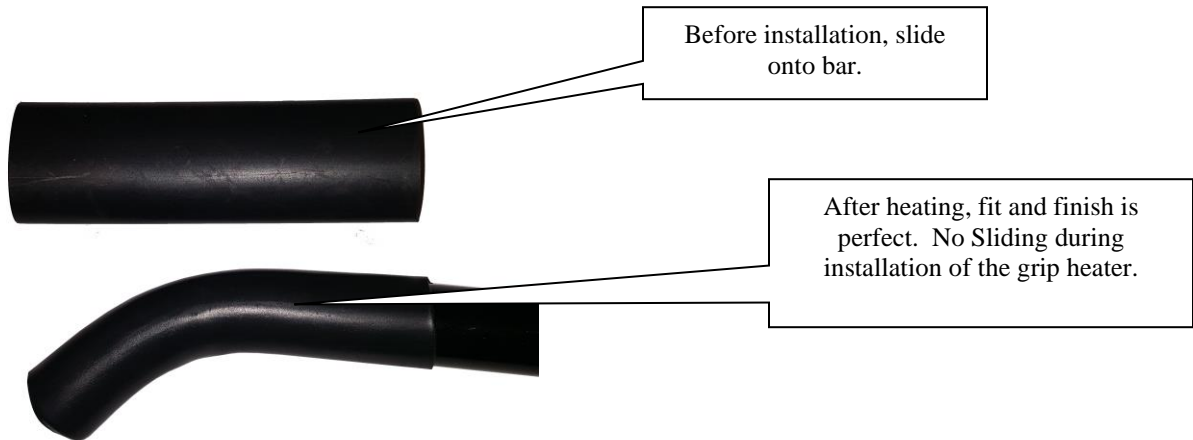

RSI Racing 15250 Hornsby St NE, Forest Lake MN 55025 www.rsiracing.com