



PLEASE READ ALL INSTRUCTIONS BEFORE INSTALLING KIT.


WARNING: BEFORE ANY INSTALLATION OF THIS RSI PRODUCT YOU NEED TO VERIFY YOUR SNOWMOBILE IS OPERATING AND WORKING CORRECTLY. VERIFY STOCK GRIP HEATERS, SWITCHES, HEADLIGHT BULBS, THUMB HEATER, ELECTRONIC REVERSE, AND MULTI FUNCTION GAUGE IS FUNCTIONING NORMALLY. IF ANY OF THESE THINGS ARE NOT FUNCTIONING NORMALLY THEY MUST BE FIXED BEFORE YOU INSTALL THIS RSI PRODUCT.

INSTRUCTIONS FOR USB-S DUAL USB POWER CABLE SKI-DOO XM AND XP

- 1. THE 2 USB CABLE END PORTS NEED TO REMAIN INSIDE A STORAGE DEVICE SUCH AS A BAG OR STORAGE COMPARTMENT. DO NOT MOUNT OUTSIDE A STORAGE COMPARTMENT!!!! ROUTE THE USB CABLE FROM YOUR ACCESSORY PLUG TO YOUR BAG/STORAGE LOCATION MAKING SURE IT IS SECURED OUT OF THE WAY FROM ANY MOVING PARTS OR EXTREME HOT PARTS/AREA'S.**
- 2. USING SUPPLIED VELCRO, SECURE CONVERTER BOX SO IT DOES NOT BANG AROUND DURING RIDING.**
- 3. ACCESSORY PLUG LOCATION:**

XM MODELS

Just over the oil tank, locate the accessory power connector (male connector with a RED/YELLOW wire and BLACK wire).

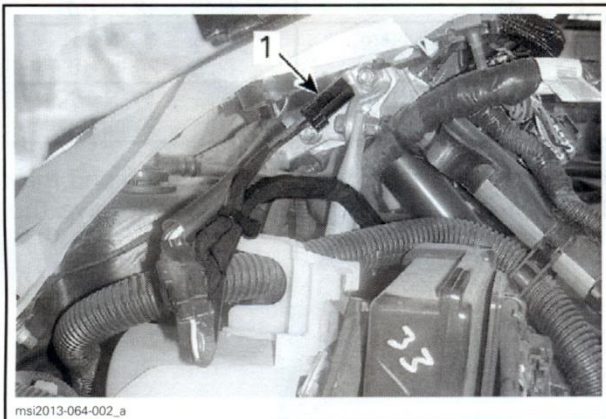


1. Accessories power connector

Installation on All Other Models

Without 12-V power outlet installed

1. Open left side panel and remove the primary air intake silencer.
2. Locate accessory power connector (male connector with a BLACK wire and a RED/YELLOW wire).

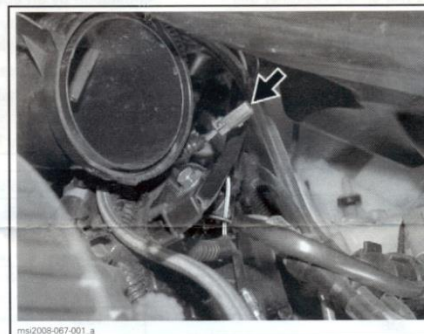

ACCESSORY POWER CONNECTOR

PHONE: (208-994-6413)

E-MAIL: CUSTOMERSERVICE@RSIRACING.COM

COPYRIGHT 2007-2016 RSI USA ALL RIGHTS RESERVED

DISCLAIMER:

RSI ASSUMES NO LIABILITY FOR MECHANICAL DAMAGE, ENGINE DAMAGE, PERSONAL INJURY OR CRASH DAMAGE OF ANY KIND DO TO IMPROPER INSTALLATION OR USE OF THIS PRODUCT. THE OWNER / OPERATOR OF THE SNOWMOBILE ASSUMES ALL LIABILITY WHEN USING THIS PRODUCT ON THEIR SNOWMOBILE.