

Polaris 900R Straightline Performance Clutch Kit (6000ft+) SKU# 123-165

Parts included in Clutch Kit:

1-Primary Spring 123-136 (Pink)

1- P22 Clutch Weight Kit (123-169)

1-Secondary Spring 125-129 (black/white)

1-TSS-04 Helix 125-132

1 – 460079K (rollers for Secondary)

Settings:

Helix Setting - Side A

Clutch weight starting point:

Base Hole – 1.3 Total

1 – Small Bolt

Center Hole — 0


Tip Hole – 0

<u>See Clutch Weight Box for overview on</u> <u>weights/washers/bolts and tungsten,</u>

1. If the 900R is Over revving change to side B on helix.

Operating RPM:

8100-8250 Stock Exhaust 8000-8100 Straightline Exhaust

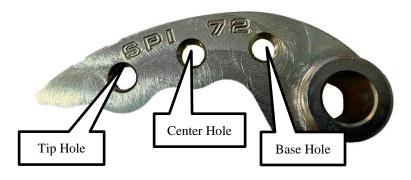

Settings: Straightline Exhaust

Helix Setting - Side A

Clutch weight starting point:

Base Hole – 1.7 Total

1 – Small Bolt

1 – Small Washer

 $Center\ Hole-1.7\ Total$

1 – Small Bolt

 $1-Small\ Washer$

Tip Hole - 1.3 Total

 $1-Small\ Bolt$

If 900R is over revving add .3g washers to all holes

<u>See Clutch Weight Box for overview on</u> <u>weights/washers/bolts and tungsten,</u>

Remove the primary clutch and install the weights and primary spring.

Remove secondary clutch and install new rollers, helix, and spring in proper setting.

Inspect all internal clutch components for wear. If excesses wear is prevalent replace needed items.

Check out Straightline @ www.straightlineperformance.com

Tech questions can be handled via e-mail at tech@straightlineperformance.com



