

2024-Current Arctic Cat Catalyst 600 Straightline Performance Clutch Kit Clutch Kit (0-3000ft) SKU# 124-173

Parts included in Clutch Kit:

1-Primary Spring (124-183)

1- Adapt Clutch Weight Kit (124-181)

1-Secondary Spring (124-184)

1-Helix (124-182)

Settings: Stock Exhaust

Clutch weight starting point:

Base Hole – 3.6g

1- Short screw

1- Tungsten Washer

Center Base Hole — 1.9g

1- Small screw

1- Metal Washer

Center tip Hole — 1.9g

1- Small screw


1- Metal Washer

Tip Hole - 0g -Empty

See Clutch Weight Box for overview on weights/washers/bolts and tungsten,

Operating RPM:

7900-8050 Stock Exhaust 8000-8150 Straightline Exhaust

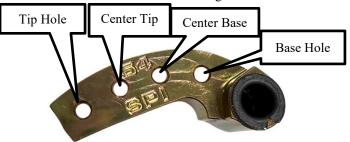

Settings: Straightline Performance Single Pipe

Clutch weight starting point:

Base Hole – 3.6g

1- Short screw

2- Tungsten

Center Inner Hole — 0g

Empty

Center Outer Hole — 1.9g

1- Small screw

3- Washer

Tip Hole - 0g -Empty

See Clutch Weight Box for overview on weights/washers/bolts and

Stock Exhaust Tuning.

-If over revving:

-Add 1 or two washers to Center tip hole. If you are still over revving remove washers and add 1 tungsten washer to same hole.

-Under Revving:

-Remove washer from Center tip hole. If still under revving remove short bolt from Center tip hole.

Straightline Performance Single Pipe:

Over revving:

-Remove 3 washers on hole 3 and put a tungsten in.

- If under revving:

-Remove 1 washer at a time from Center tip hole until hitting 8000-8150 rpm.

Check out Straightline @ www.straightlineperformance.com Tech questions can be handled via e-mail at tech@straightlineperformance.com