

STRAIGHTLINE PERFORMANCE

121-241

2016-17 Ski-doo 600 RS Race Set-up for P-Drive/TSS-04

Bill of Materials in Clutch Kit:

- 1 P-Drive Primary Spring 200-380lbs (121-243)
- 3 Adjustable P-Drive Weight Kit (121-242)
- 1 TSS-04 Secondary Spring (955556)
- 1 Helix-SPI-26
- 1 P-Drive Shim 1mm(486-016-046)
- 1 P-Drive Spring Cup (486-016-045)

Settings:

Weight Clicker Position #4

Helix Location - A

P-Drive Weight Setting


1. Base Bolt Weight - 13.2-13.8g

2. Hole #1 Weight - 3.5g-4.0g

3. Hole #2 Weight - 1g-1.5g

Checked by:

A Straightline Clutch kit should always be installed by a certified snowmobile professional. Improper setting or installation can cause the machine to perform incorrectly or engine damage.

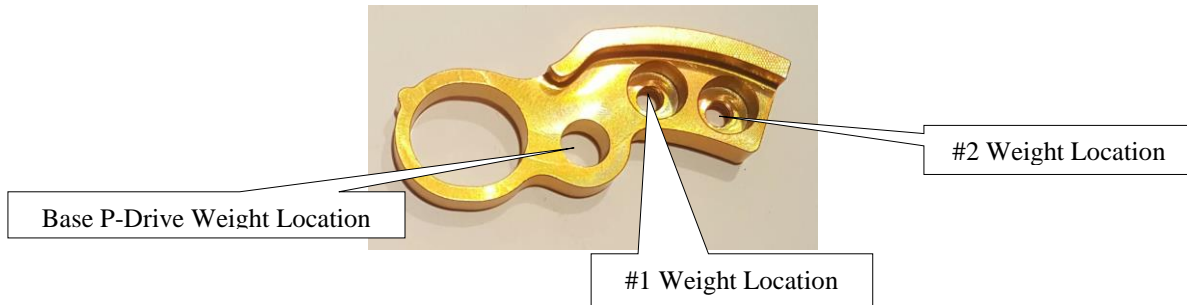

P-Drive Clutch Assembly Items.

- 6- 10-32 x 3/8 Socket Cap Head Bolt – 1.8g
- 6- 10-32 x 3/16 Socket Cap Head Bolt – 1.3g
- 24- #12 Washer - .3g
- 3- Base/Main Bolt – 13.2-13.7g
- 12 - Magnet Weight – 1.3g

Technical questions please email tech@straightlineperformance.com



Facebook @ straightlineperformanceinc

Youtube @ straightlineperfinc

Twitter @ straightlineperf

Straightline Performance
15250 Hornsby St NE
Forest Lake, MN 55025 651-466-0212
www.straightlineperformance.com